



ITEM 3 NOT VISIBLE SEE SECTIONAL DETAIL 'A'

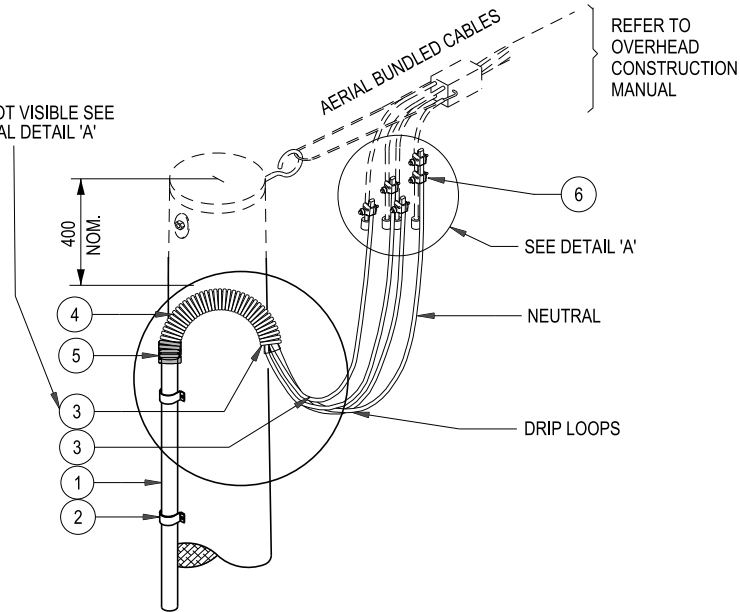

CONDUIT TO BE FIXED TO POLE AT 800mm MAXIMUM INTERVALS

SEE DRAWING CEOM7204.11 FOR MORE DETAILS



**NOTES**

1. XLPE is to be pulled back into conduit bend to ensure no exposure to UV.
2. For services refer NSW Service and Installation Rules.

**\*\* As required items are not included \*\***

7	4	End cap seal 95-150mm <sup>2</sup> ABC	113420
6	5	Connector 25-95mm <sup>2</sup> ABC Piercing	222570
5	1	Coupling 50mm PVC	273600
4	AS REQD	Conduit 50mm Med Duty Corrugated (Grey) 25M	281400
3	1	Heatshrink Sleeve 10-5mmx1200mm Long	262222
	1	Breakout kit CE34	262371
2	AS REQD	Clamp 30 - 100mm Cable Universal	291760
1	AS REQD	Conduit 50mm x 4m L/Grey	282090
ITEM		DESCRIPTION	CAT. No

**AMENDMENT DETAILS**

6	DRAWN	S.HAYNES
	CHCKD	D. KELLY
	DATE	12/03/2020
ITEM 6 REMOVED		
5	DRAWN	S. HAYNES
	CHCKD	D. KELLY
	DATE	11/07/2018
ASSEMBLIES TABLE REMOVED. TYPICAL ARRANGEMENT ASSEMBLY 1&2 REMOVED. SECTIONAL DETAIL 'A' REMOVED. ASSY 1,2&3 REMOVED. ITEM 3 REMOVED		
4	DRAWN	J.DOWLING
	CHCKD	D.KELLY
	DATE	01/07/2014

ITEM 7 PART No. WAS 273600. ASSEMBLY 3 ADDED. AUTHORIZATION WAS WAYNE JOHNSON. TYPICAL ARRANGEMENT ASSEMBLY 3 ADDED. ITEM NUMBERS 8 & 9 ADDED.



SCALE	NTS
ISSUED	31/01/2007
DRAWN BY	CH/LRW
CHECKED BY	W.JOHNSON

AUTHORISED BY

*Graeme Barnewall*

PRINCIPAL ENGINEER UNDERGROUND CONSTRUCTION STANDARDS

DATE 24/07/2018

**CEOM7204.14**

# 1 of 1 A4

LOW VOLTAGE  
AERIAL BUNDLED  
CABLE TO  
UNDERGROUND  
16-50sqmm  
LOW VOLTAGE CABLE

